


FOUR DRIVE TRACTOR

Model E.

15-30 Horse Power ALL WEIGHT (100%) ON TRACTION

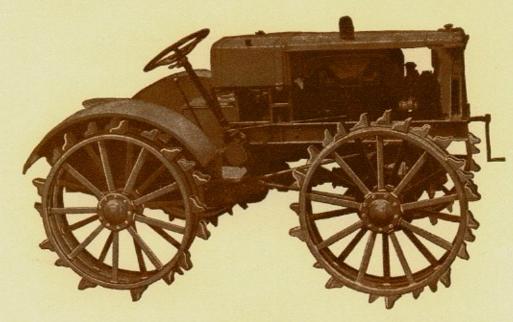

The latest product of the World's oldest FOUR DRIVE TRACTOR builders. FIFTEEN YEARS experience building Four Drive Tractors exclusively.

SPECIFICATIONS

MOTOR - Waukesha, 4-cylinder; Vertical 4%x5% in. OILING SYSTEM Forced feed by pump GOVERNOR Built in	WEIGHT with 4½ in., Spade lugs, 5100 lbs RADIATOR 7 gallons, tubular MAGNETO Bosch, with Impulse Starter
FUEL Kerosene, gasoline	CARBURETOR Kingston or Ensign
TANK CAPACITY 25 gal.; 3 gal.	APPLICATION POWER ALL 4 WHEELS
DIAMETER BELT PULLEY 12 inches	HOW APPLIED Live axles
WIDTH BELT PULLEY 8 inches	REDUCTION GEARS Nickel, stee
WHEEL BASE 66 inches	FRONT DRIVE Bevel Gear and Pinion
TOTAL LENGTH 106 inches	REAR DRIVE Bevel Gear and Pinion
TREAD 60 inches	AXLES Chrome Vanadium
TOTAL WIDTH 70 inches	TRANSMISSION Own
	(High 7 miles per hour
TOTAL HEIGHT 61 inches	SPEEDS_ (Intermediate 3% M. P. H.
FRONT AND REAR WHEELS 40x10 inches	SPEEDS- (Intermediate 3% M. P. H (Low 1½ miles per hour
TURNING RADIUS 13 feet	(Reverse 11/2 miles per hour
DRAW BAR RATING-15 HORSE	POWER IN INTERMEDIATE.
DELE DOWED DATING 20 HODGE DOWED	